

CARPET TILE SPECIFICATION CITY LIFE: STREET CORNER

Construction	: Tufted Multi-Level Loop
Pile Content	: 100% Polypropylene BCF
Dyeing Method	: Solution Dyed
Tufting Gauge	: 1/12 inch
Tufted Density	: 1,931 / Dm ²
Pile Weight	: 21 oz./sq.yd. (712 gram/sq.m.)
Pile Height	: 3 – 5 mm.
Primary Backing	: Non Woven Polyester Spunbond
Secondary Backing	: EcoSquare, Glass Reinforced Recycled Backing
Tile Size	: 50 x 50 cm.

Performance

Overall Classification (BS EN 1307)	: General
Castor Chair Rating (BS EN 985)	: ≥ 2.4 Continuous use
Dimension Stability (BS EN 986)	: ≤ 0.15%
Static Electricity (AATCC 134)	: ≤ 3.0 kV, under standard test condition (70 F & 20% RH)


Colour Fastness

To Light (ISO 105 B02)	: Minimum 6 or better
To Rubbing Wet (ISO 105 – X12)	: Minimum 4
To Rubbing Dry (ISO 105 – X12)	: Minimum 4

Flammability

Hot Metal Nut Test (BS 4790)	: Low radius of effects of ignition
Flame Resistance (ASTM D 2859)	: Passes Methenamine Pill Test

Installation Method

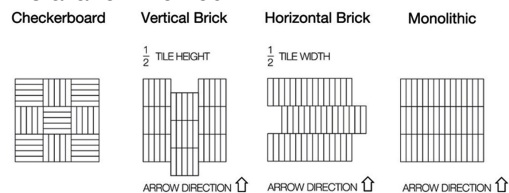

Certification



We apply strict quality control at all stages of production, in compliance with ISO 9001. However, the carpet manufacturing process is a complex series of operations and variations in the specifications could occur. This will not have any detrimental effect on the performance of the product. We reserve the right to amend this specification without prior notice.